



FLAT ROOF: SLIP SHEET

A/C support stanchions (Sleepers) need to be removed prior to coating using a roof top A/C jack system or similar process. After the AWS system is installed in accordance to the published Application Guideline, a slip sheet is added before the stanchions are replaced and the A/C is lowered back to the roof.

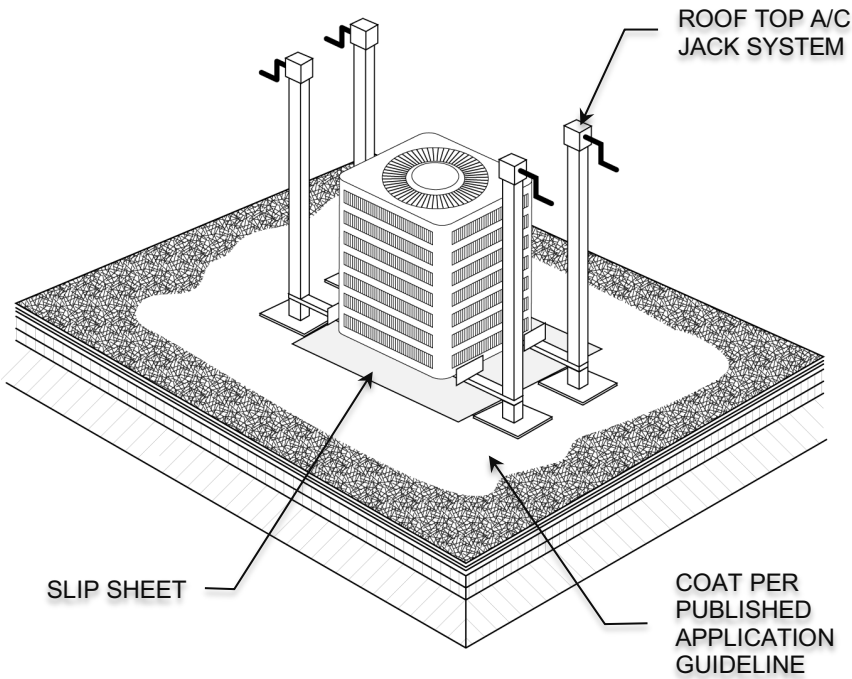

Contact American WeatherStar with any questions.

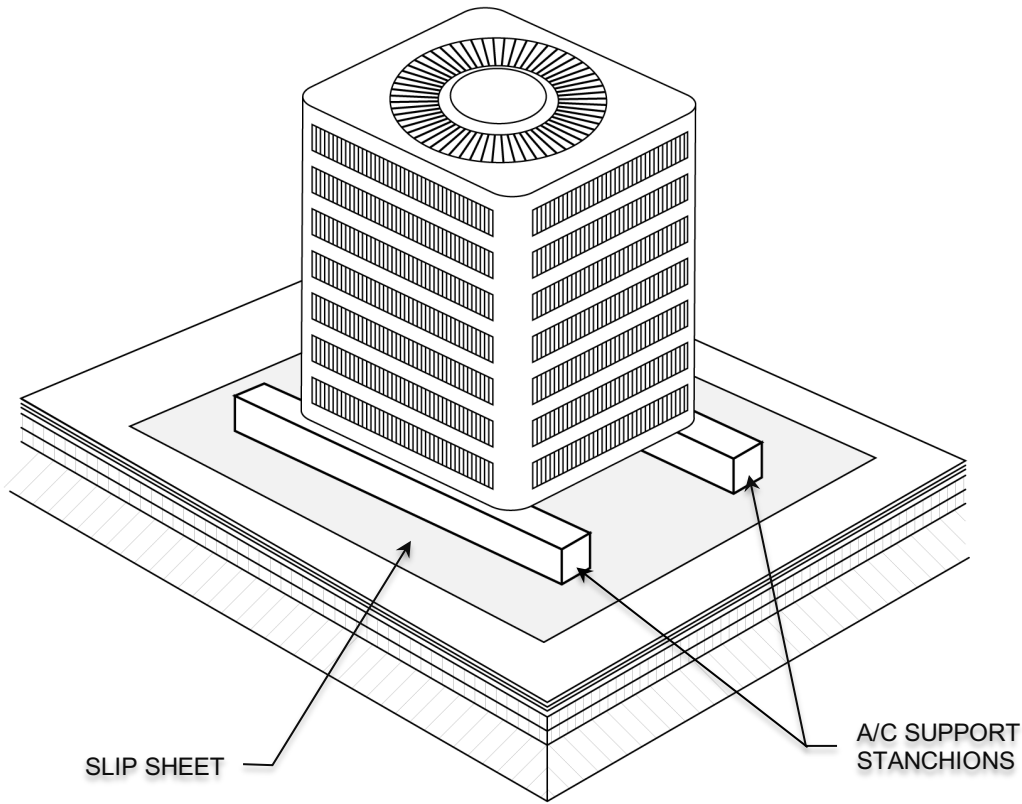

NOTE: Stanchions should be in good condition. Rotten and/or deteriorated stanchions should be replaced. Slip sheet should extend a minimum of 6" beyond the outside edges of stanchion.



800.771.6643

AMERICANWEATHERSTAR.COM

A/C SUPPORT STANCHION

See specific application guideline for suitable AWS slip sheet.

NOTE: This detail is provided to show a generally recommended procedure for dealing with the condition shown. It will not and cannot provide a specific solution for every condition likely to be encountered in field application. Where field conditions differ, the use of applicable portions of the detail shown or its adaptation by an experienced and conscientious applicator should result in a quality project.

LEGEND



SLIP SHEET

REVISION DATE: 04/21/2022

SCALE: NTS