

Met-A-Gard™

ROOF RESTORATION SYSTEM

The Preferred Metal Roof Restoration Solution

The Met-A-Gard Roof Restoration System is the preferred solution to restore and protect aged metal roof surfaces. Based on the proven performance of Acrylic 211 with industry-leading elongation and tensile strength, the ENERGY STAR®-rated Met-A-Gard System sets the standard for quality, performance, affordability, and value in metal roof repair and restoration.

The Met-A-Gard System offers facility managers and property owners a variety of money-saving benefits. It does more than stop leaks—it effectively prevents rust and corrosion, reduces maintenance costs, lowers energy consumption, improves performance, and extends service life. Best of all, the Met-A-Gard System costs significantly less than a total roof replacement.

Basic Uses

The Met-A-Gard Roof Restoration System System is specifically formulated to seal, waterproof, and protect metal roofs from the harmful effects of the sun, wind, and rain. The system's main component, Acrylic 211, contains strong algacides which make it ideal for application over metal roofs. The Met-A-Gard System is designed for metal roofs affected by moderate levels of rust and corrosion with positive drainage. Roofs with areas of ponding water must be corrected before the system can be installed.

Features/Benefits

- Stops leaks and vastly improves performance
- Costs significantly less than a total roof replacement
- Substantially reduces maintenance and energy costs
- Extends service life by restoring the existing metal roof surface
- Excellent elongation, tensile strength, reflectivity, and durability
- Cures to form a seamless, watertight membrane
- Eliminates the onset of rust and corrosion
- Long-term warranty options available
- Minimal interruption to business

Suitable Substrates

- Metal

SURFACE PREPARATION

To ensure optimal adhesion, the roof is pressure washed to remove all dirt, dust, and debris. In some cases, a primer application (1A) of Red Oxide Rust Prime 912 may be necessary.

SEAMS/DETAILS


All seams and flashing details are coated with a thick “rubber-like” mastic to help withstand the expansion and contraction of the roof structure.

BASE COAT

An ivory-tinted base coat Acrylic 211 ensures uniform mil thickness and is uniquely formulated for maximum adhesion to metal roof surfaces.

TOP COAT

A white top coat of Acrylic 211 provides the system with superior durability, reflectivity, weatherability, and mildew resistance.

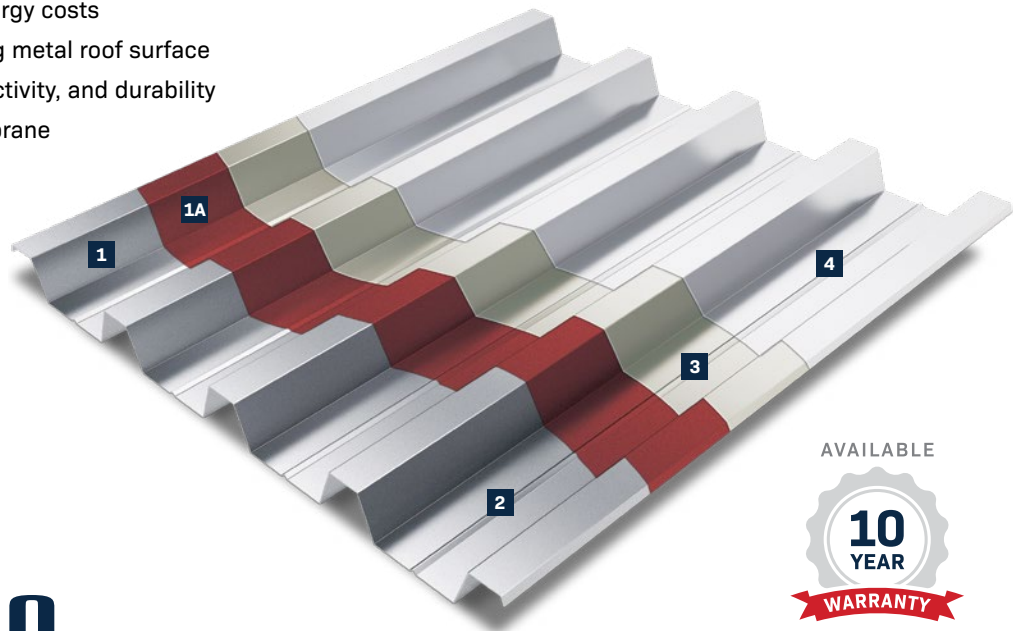

AVAILABLE



QUICK SPEC

ADHESION TEST

To ensure a successful application, an adhesion test is recommended to ensure maximum adhesion of the Acrylic 211 base coat to the metal roof substrate.

PRE-INSPECTION

Before system application, pre-inspect the roof for necessary repairs. The inspection should include, but not be limited to:

- HVAC flashing
- Proper drainage
- Water leakage
- Fasteners
- Skylights
- Horizontal seams
- Vertical seams
- Roof penetrations
- Sign or display anchorage
- Coping and flashing

INSTALLATION TIPS

- All roof surfaces to be coated must be properly cleaned and prepared. Pressure washing at 3000-4000 psi is recommended.
- Existing coatings must be checked for proper adhesion. Before application, any loosely adhered coating must be removed and bare surfaces must be prepared, cleaned, and checked for compatibility. In some cases, the use of a primer may be necessary.
- Acrylic 211 may be applied using medium nap roller, synthetic brush, tank spreader, or airless spray equipment.
- Apply Acrylic 211 base coat to clean, dry, sound surfaces free of contaminants and other foreign matter.
- Depending on temperature and humidity, allow 24 hours between coating applications. For technical assistance, please contact your American WeatherStar Field Representative.

RUSTY PANELS

Rust, also known as iron oxide, is formed by a chemical reaction in which iron oxidizes when in the presence of oxygen and water or excessive moisture. Iron Oxide lacks many of the structural characteristics of the original iron material and will continue to spread deeper into the material. If left alone, rust almost always result in failure of the panel. Rust primers from American WeatherStar neutralize existing rust and prevent it from advancing.

SKYLIGHTS

Skylights that are still within their serviceable life can be renewed and restored with American WeatherStar Skylight Sealer 230 clear liquid-applied membrane.

TECHNICAL DATA

ACRYLIC 211

Solids by Volume	55% ± 2
Elongation	233% ± 20
Tensile Strength	273 ± 20 psi
Reflectivity	Initial .87 After 3 years .78
Emissivity	.89
Viscosity	4500 ± 500 cps
Permeability	14 ± 3
VOC	<50g/Liter

RED OXIDE RUST PRIME 912

Color	Red
Solids by Volume	40% ± 2
Viscosity	600-800 cps
Dry time	2-3 hours

Please see product data sheets for complete technical data.

SUBSTRATE	TERM	BASE COAT	INTERMEDIATE COAT	TOP COAT	TOTAL DFT*
Metal	5 years	Acrylic 211	-	Acrylic 211	12
	10 years	Acrylic 211	-	Acrylic 211	16

*Dry film thickness (DFT) is rounded to the nearest mil and is theoretical. Actual DFT varies depending on substrate, application technique, and waste factor.

NOTE: This document is intended as an overview of installation procedures only. Please refer to application guidelines for complete installation information. Published technical information is subject to change without notice. Please visit www.americanweatherstar.com or contact your Field Representative for current technical data.

